


Laser Diode Driver Board

It is a driver card that provides temperature and current control of Type1 Buterfly diodes with potentiometers on the card or signals that can be given from outside.

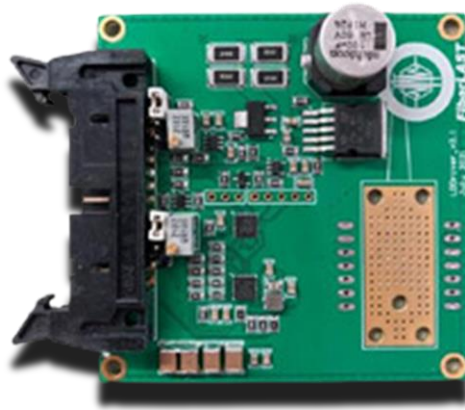

Parameters	Values
Brand/Model	FiberLAST/LD Driver
Adjustable Temperature Range	5°C to 40°C
Adjustable Current Range	0A from 2A
Connector Type	2*13 with 26 pins, 2.54mm pin pitch
Operating Temperature	-20' to +55' oC
Operating Voltage	5 VDC
Dimensions	70*70 mm

FiberLAST Fiber Laser Systems and Technologies Inc.

Center: ODTÜ Teknokent Galyum Blok Z-3, 06800 Cankaya-Ankara/ Türkiye
 Branch Office: Mustafa Kemal Mah. Dumlupınar Blv. 280/D-E Blok E-2, METU Teknokent, 06530 Cankaya-Ankara/Türkiye
 Phone +90 312 205 59 29 Fax +90 312 210 15 95 E-mail info@fiberlast.com.tr www.fiberlast.com.tr